



Kronos | Zefiro | Granduca



ROLLER TEAM

EN | 21



KRONOS RANGE

INTRO	PAG.	4
STANDARD EQUIPMENT	PAG.	6
TECHNICAL DATA	PAG.	8



ZEFIRO RANGE

INTRO	PAG.	20
STANDARD EQUIPMENT	PAG.	22
TECHNICAL DATA	PAG.	24



GRANDUCA RANGE

INTRO	PAG.	36
STANDARD EQUIPMENT	PAG.	38
TECHNICAL DATA	PAG.	40

WHY CHOOSING ROLLER TEAM

EXPS TECHNOLOGY	PAG.	42
BREATHE TECHNOLOGY	PAG.	44
GARAGE AND STOWAGE	PAG.	46
THE ITALIAN WITH A NORDIC DISPOSITION	PAG.	48
HEATING	PAG.	49

OVERCAB



ZEFIRO

KRONOS

LOW-PROFILE



ZEFIRO

KRONOS

FULL-INTEGRATED

KRONOS

ZEFIRO

LOW-PROFILE

GRANDUCA



< 6 Meters

271 M 5.99m



291 M 5.99m



< 7 Meters

277 M 6.99m



279 M 6.99m




295 M 6.99m



230 TL 6.30m




291 P 5.99m




234 TL 6.99m




261 P 6.99m




283 P 6.99m




285 P 6.99m



294 P 6.47m



295 P 6.99m



> 7 Meters

284 M 7.45m



290 M 7.43m



VAN

Discover the Livingstone series in the technical catalog.


LIVINGSTONE



265 P 7.45m



266 P 7.45m



267 P 7.45m



268 TL 7.43m




274 TL 7.33m




282 P 7.43m




284 P 7.45m




286 P 7.45m



287 P 7.45m



298 P 7.43m



265 Integral 7.45m



267 Integral 7.45m



274 Integral 7.33m



284 Integral 7.45m



287 Integral 7.45m




267 P 7.45m



287 P 7.45m



298 P 7.45m



Kronos

Your dream is now a reality. Start exploring the world.

For those who approach the world of plein air, complete in all equipment with an excellent quality/price ratio. A wide range of models; compact for the couple or with more generous volumes for the large family. Choose from **30 models** and **3 types** between low-profile, overcab and full-integrated motorhomes, available on Ford and Fiat mechanics.





Living area

- Choose your tailor-made dinette
- Dinette with swivel seats that integrate into the living area
- Face to face dinette
- Double opposing dinette
- Large windows and skylight
- Table in polished laminate
- Folding top table
- Dark wood furniture
- Ergonomic dinette seats
- Seat covers coordinated with the fabric upholstery

Kitchen

- Choice between longitudinal and L-shaped
- Two-door refrigerator with bottle compartment for up to 140 l bottles
- Two or three-burner hob with glass cover
- Methacrylate panel
- Drawers with cutlery tray
- Extraction baskets

Sleeping area

- Slatted beds
- Large beds
- Maxi central beds 190x150 cm
- Bed in dinette (where available)
- Breathable mattresses
- Windows and portlights for more light and ventilation

Bathroom

- Wooden furniture
- Large shower with double drain
- Large wall units
- Large mirrors with integrated lighting and portlight
- Rigid shower partition door
- Door separating the living area from the sleeping area



On-board technology

- Perimeter Combi 4 gas heating
- Heating in the overcab area
- LED lighting
- Floor perimetral night-time courtesy lights
- LED spot lights under the wall units
- USB sockets in the living area
- 12 V-220 V electrical socket in garage and TV socket (Kronos 290M)

Chassis

- Ford Transit 2.0 TDCI 130 HP, emission class EURO 6
- Fiat Ducato 2.3MJ 120HP, emission class EURO 6
- DRL (day running light) headlights
- Driver and passenger airbags
- ESC (FIAT)
- ESP (FORD)
- Bluetooth radio with controls on steering wheel
- Manual climate control system
- Driver and passenger airbags
- Cruise control
- Integrated aerial
- Cab swivel seats

Exteriors

- Painted bumpers
- Open sky, panoramic roof (standard on low-profile motorhomes)
- Entrance door with fixed window and flyscreen
- 16" wheels (FORD)
- Seitz windows
- Low gas maxi-garage
- XXL garage with a maximum load capacity of 300 kg
- Rear-view camera
- 120 V solar panel
- 6-year infiltration warranty

Upholstery



Madras (Standard ■, Fabric)



Evoque (Optional □, Imitation Leather)



Lux (Optional □, Fabric/Imitation Leather)

KRONOS
LOW-PROFILE WITHOUT
ELEVATING BED



	261 P	265 P	266 P	267 P	282 P	283 P	284 P
--	-------	-------	-------	-------	-------	-------	-------

MECHANICS AND CHASSIS													
Mechanical unit	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit
Engine, Power hp	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP
Maximum technically permissible weight (Kg)	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500
Weight unladen in running conditions (Kg)	2965 /3162	2928 / 3162	3015 / 3072	2978 / 3072	3115 / 3157	3150 / 3160	3025 / 3157	2988 / 3157	3015 / 3072	3008 /3072	2935 / 3077	2898 / 3077	3015 / 3072
Pay Load (Kg)	338 / 535	338 / 572	428 / 485	428 / 522	385 / 343	350 / 340	343 / 475	343 / 512	428 / 485	428 / 492	423 / 565	423 / 602	428 / 485
Wheelbase (mm)	3750	3800	3954	4035	3954	4035	3954	4035	3954	3800	3750	4035	3954
Motorhome weight plus trailer (kg)	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5065
Wheels dimensions	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"
DIMENSIONS AND PLACES													
External lenght (mm) / External width (mm)	6990 / 2350		7450 / 2350		7450 / 2350		7450 / 2350		7450 / 2350		6990 / 2350		7450 / 2350
External height(mm) / Internal height (mm)	2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080
Homologated seats	4		5		4		4		5		5		5
Berths (optional dinette)	3		3		3		3		3		3		3
Auxiliary bed in dinette	S		S		S		S		S		S		S
Rear Bed (cm)	190x150		190x150		190x150		190x150		204x80 / 193x80		180x80 - 189x80		220x80 / 194x80
Dimensions Auxiliary bed in Dinette (cm)	216x90(80)		212x54		216x101		212x100		212x50		216x87(54)		212x54
Overcab bed (cm)/ Elevating Bed (cm)	- / -		- / -		- / 190x128(107)		- / -		- / -		- / -		- / -
Additional seat rear bed	-		-		-		-		0		S		S
Rear bed height adjustment	S		S		S		S		-		-		-
Locker (useful opening, cm)	117x 87(72) / 72x87(72)		117x87(72) / 72x87(72)		117x87(72) / 72x87(72)		117x 87(72) / 72x87(72)		42x97 - 60x52 - 42x97		117x87(72) / 117x87(72)		117x87(72) / 117x87(72)
Max. internal garage height (mm)	128		128		128		128		77		126		119
Floor / walls / roof thickness (mm)	54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31
Floor / walls / roof material (mm)	VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR
Fiberglass roof, hail-proof	S		S		S		S		S		S		S
INSTALLATIONS													
Burners / Gas oven / Suction hood	3 / 0 / -		3 / 0 / -		2 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -
Tank capacity: clear water / wastewater (L**)	(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100
Automatic trivalent fridge (220V, 12V, gas) (L)	140		140		140		140		140		140		140
Standard heating system	Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W
SKYLIGHT													
Panoramic roof (mm)	S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)
Rear skylight (mm)	400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)
Central skylight (mm)	400x400		400x400		400x400		400x400		400x400		400x400		400x400
Dinette skylight (mm)	700x500		700x500		700x500		700x500		700x500		700x500		700x500
Skylight toilette/shower (mm)	- / S		- / S		- / S		- / S		- / S		- / S		- / S

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

S= standard O=optional - = not available VTR= Fiberglas

Standard equipment

- ▶ Painted bumpers
- ▶ 16" wheels (FORD)
- ▶ Panoramic roof
- ▶ Solar panel
- ▶ Rear-view camera
- ▶ Door with fixed window
- ▶ Entrance door flyscreen
- ▶ ESC (FIAT) ESP (FORD)
- ▶ Integrated Radio DAB aerial and Bluetooth radio with controls on steering wheel
- ▶ Manual climate control system
- ▶ Driver and passenger airbags
- ▶ Cruise control
- ▶ Swivel seats with seat covers
- ▶ Slatted bed
- ▶ 6-year warranty against infiltrations



KRONOS
LOW-PROFILE WITHOUT
ELEVATING BED



	285 P	286 P	287 P	291 P	294 P	295 P	298 P
--	-------	-------	-------	-------	-------	-------	-------

MECHANICS AND CHASSIS													
Mechanical unit	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit
Engine, Power hp	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP
Maximum technically permissible weight (Kg)	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500
Weight unladen in running conditions (Kg)	2935 / 3077	2898 / 3077	3015 / 3072	2978 / 3072	3025 / 3157	2988 / 3157	2935 / 3127	2900 / 3170	2885 / 3082	2848 / 3082	2925 / 3077	2968 / 3072	3005 / 3072
Pay Load (Kg)	423 / 565	423 / 602	428 / 485	428 / 522	343 / 457	343 / 512	373 / 565	600 / 330	418 / 615	418 / 652	428 / 495	428 / 532	428 / 495
Wheelbase (mm)	3750	3800	3954	4035	3954	4035	3300	3450	3300	3450	3954	4035	3954
Motorhome weight plus trailer (kg)	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5065
Wheels dimensions	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"
DIMENSIONS AND PLACES													
External lenght (mm) / External width (mm)	6990 / 2350		7450 / 2350		7450 / 2350		5995 / 2350		6470 / 2350		6990 / 2350		7450 / 2350
External height(mm) / Internal height (mm)	2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080
Homologated seats	5		5		4		4		5		5		5
Berths (optional dinette)	3		3		3		3		3		3		3
Auxiliary bed in dinette	S		S		S		S		S		S		S
Rear Bed (cm)	190x80 / 203x80		220x80 / 194x80		200x80 / 194x80		213x125(118)		216x135(118)		216x135(120)		207x129
Dimensions Auxiliary bed in Dinette (cm)	212x54		212x54		212x100		198x92		212 x 113 (50)		216 x 90 (50)		216x83
Overcab bed (cm)/ Elevating Bed (cm)	- / -		- / -		- / -		- / -		- / -		- / -		- / -
Additional seat rear bed	S		-		-		-		S		S		S
Rear bed height adjustment	-		-		-		-		S		S		S
Locker (useful opening, cm)	117x87(72) / 117x87(72)		72x87(72) / 72x87(72)		117x87(72) / 117x87(72)		117x60 / 117x60		130x102(72) / 100x67		130x102(72) / 130x102(72)		130x102(72) / 130x102(72)
Max. internal garage height (mm)	119		75		120		128		130		130		130
Floor / walls / roof thickness (mm)	54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31
Floor / walls / roof material (mm)	VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR
Fiberglass roof, hail-proof	S		S		S		S		S		S		S
INSTALLATIONS													
Burners / Gas oven / Suction hood	3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -
Tank capacity: clear water / wastewater (L**)	(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100
Automatic trivalent fridge (220V, 12V, gas) (L)	140		140		140		140		140		140		140
Standard heating system	Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W
SKYLIGHT													
Panoramic roof (mm)	S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)
Rear skylight (mm)	400x400 (O 700x500)		400x400 (O 700x500)		400x400 (O 700x500)		400x400 (O 700x500)		400x400 (O 700x500)		400x400 (O 700x500)		400x400 (O 700x500)
Central skylight (mm)	400x400		400x400		400x400		400x400		400x400		400x400		400x400
Dinette skylight (mm)	700x500		700x500		700x500		700x500		700x500		700x500		700x500
Skylight toilette/shower (mm)	- / S		- / S		- / S		- / S		- / S		- / S		- / S

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

S= standard O=optional - = not available VTR= Fibreglas

Standard equipment

- ▶ Painted bumpers
- ▶ 16" wheels (FORD)
- ▶ Panoramic roof
- ▶ Solar panel
- ▶ Rear-view camera
- ▶ Door with fixed window
- ▶ Entrance door flyscreen
- ▶ ESC (FIAT) ESP (FORD)
- ▶ Integrated Radio DAB aerial and Bluetooth radio with controls on steering wheel
- ▶ Manual climate control system
- ▶ Driver and passenger airbags
- ▶ Cruise control
- ▶ Swivel seats with seat covers
- ▶ Slatted bed
- ▶ 6-year warranty against infiltrations



KRONOS
LOW-PROFILE WITH
ELEVATING BED



	230 TL	234 TL	261 TL	265 TL	266 TL	267 TL	268 TL	274 TL	282 TL
--	--------	--------	--------	--------	--------	--------	--------	--------	--------

MECHANICS AND CHASSIS																		
Mechanical unit	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato
Engine, Power hp	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP
Maximum technically permissible weight (Kg)	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500
Weight unladen in running conditions (Kg)	2935 / 3169	2898 / 3169	3015 / 3115	2980 / 3080	2965 /3162	2928 / 3162	3015 / 3072	2978 / 3072	3115 / 3157	3150 / 3160	3025 / 3157	2988 / 3157	3055 / 3157	3018 / 3157	2945 / 2988	2923 / 2988	3015 / 3072	3008 /3072
Pay Load (Kg)	331 / 565	331 / 602	485 / 385	520 / 420	338 / 535	338 / 572	428 / 485	428 / 522	385 / 343	350 / 340	343 /475	343 / 512	343 / 445	343 / 482	512 / 555	512 / 577	428 / 485	428 / 492
Wheelbase (mm)	3954	4035	3750	3800	3750	3800	3954	4035	3954	4035	3954	4035	3954	4035	3954	4035	3954	3800
Motorhome weight plus trailer (kg)	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500
Wheels dimensions	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"
DIMENSIONS AND PLACES																		
External length (mm) / External width (mm)	6200 / 2350		6990 / 2350		6990 / 2350		7450 / 2350		7450 / 2350		7450 / 2350		7430 / 2350		7330 / 2350		7430 / 2350	
External height(mm) / Internal height (mm)	2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080	
Homologated seats	4		4		4		4		4		4		4		6		5	
Berths (optional dinette)	4		4		4 (5 0)		4 (5 0)		4 (5 0)		4 (5 0)		4		6		4 (5 0)	
Auxiliary bed in dinette	S		S		0		0		0		0		S		S		0	
Rear Bed (cm)	210x70		210x70		190x150		190x150		190x150		190x150		190x150		216x100(84) / 216x100(84)		204x80 / 193x80	
Dimensions Auxiliary bed in Dinette (cm)	216x77		216x125		216x90(80)		212x54		216x101		212x100		-		200x62 / 189x65		212x50	
Overcab bed (cm)/ Elevating Bed (cm)	- / 190 x 148(123)		- / 190x160		- / 190x128(95)		- /190x128(107)		- / 190x128(107)		- /190x128(107)		- / 190x128(107)		- / 190x133(124)		- / 190x128(107)	
Additional seat rear bed	-		-		-		-		-		-		-		S		0	
Rear bed height adjustment	-		-		S		S		S		S		-		-		-	
Locker (useful opening, cm)	147x67 / 100x67		147x67 / 100x67		117x 87(72) / 72x87(72)		117x87(72) / 72x87(72)		117x87(72) / 72x87(72)		117x 87(72) / 72x87(72)		117x87x(72) / 40x87(72)		100x67 / 100x67		42x97 - 60x52 - 42x97	
Max. internal garage height (mm)	130		130		128		128		128		128		120		138		77	
Floor / walls / roof thickness (mm)	54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31	
Floor / walls / roof material (mm)	VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR	
Fiberglass roof, hail-proof	S		S		S		S		S		S		S		S		S	
INSTALLATIONS																		
Burners / Gas oven / Suction hood	3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		2 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -	
Tank capacity: clear water / wastewater (L**)	(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100	
Automatic trivalent fridge (220V, 12V, gas) (L)	140		140		140		140		140		140		90		140		140	
Standard heating system	Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W	
SKYLIGHT																		
Panoramic roof (mm)	S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)	
Rear skylight (mm)	400x400		400x400		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)	
Central skylight (mm)	400x400 (0 700x500)		400x400 (0 700x500)		400x400		400x400		400x400		400x400		400x400		400x400		400x400	
Dinette skylight (mm)	-		-		-		-		-		-		-		-		-	
Skylight toilette/shower (mm)	- / S		- / S		- / S		- / S		- / S		- / S		- / S		S		S	


The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

S= standard O=optional - = not available VTR= Fibreglas

Standard equipment

- ▶ Painted bumpers
- ▶ 16" wheels (FORD)
- ▶ Panoramic roof
- ▶ Solar panel
- ▶ Rear-view camera
- ▶ Door with fixed window
- ▶ Entrance door flyscreen
- ▶ ESC (FIAT) ESP (FORD)
- ▶ Integrated Radio DAB aerial and Bluetooth radio with controls on steering wheel
- ▶ Manual climate control system
- ▶ Driver and passenger airbags
- ▶ Cruise control
- ▶ Swivel seats with seat covers
- ▶ Slatted bed
- ▶ 6-year warranty against infiltrations



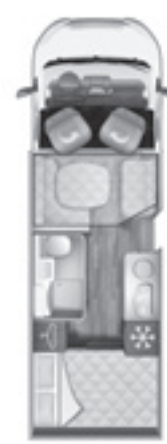

	283 TL	284 TL	285 TL	286 TL	287 TL	291 TL	294 TL	295 TL	298 TL
--	--------	--------	--------	--------	--------	--------	--------	--------	--------

MECHANICS AND CHASSIS																	
Mechanical unit	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit
Engine, Power hp	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP
Maximum technically permissible weight (Kg)	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500
Weight unladen in running conditions (Kg)	2935 / 3077	2898 / 3077	3015 / 3072	2978 / 3072	2935 / 3077	2898 / 3077	3015 / 3072	2978 / 3072	3025 / 3157	2988 / 3157	2935 / 3127	2900 / 3170	2885 / 3082	2848 / 3082	2925 / 3077	2888 / 3077	3005 / 3072
Pay Load (Kg)	423 / 565	423 / 602	428 / 485	428 / 522	423 / 565	423 / 602	428 / 485	428 / 522	343 / 457	343 / 512	373 / 565	600 / 330	418 / 615	418 / 652	423 / 575	423 / 612	428 / 495
Wheelbase (mm)	3750	4035	3954	3800	3750	3800	3954	4035	3954	4035	3300	3450	3300	3450	3750	3800	3954
Motorhome weight plus trailer (kg)	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5500
Wheels dimensions	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"
DIMENSIONS AND PLACES																	
External lenght (mm) / External width (mm)	6990 / 2350		7450 / 2350		6990 / 2350		7450 / 2350		7450 / 2350		5990 / 2350		6470 / 2350		6990 / 2350		7450 / 2350
External height(mm) / Internal height (mm)	2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080
Homologated seats	5		5		5		5		4		4		5		5		5
Berths (optional dinette)	4 (5 0)		4 (5 0)		4 (5 0)		4 (5 0)		4 (0 5)		4		4 (5 0)		4 (5 0)		4 (5 0)
Auxiliary bed in dinette	0		0		0		0		0		-		0		0		0
Rear Bed (cm)	180x80 - 189x80		220x80 / 194x80		199x80 - 186x80		220x80 / 194x80		200x80 / 194x80		213x125(118)		216x135(118)		216x135(120)		207x129
Dimensions Auxiliary bed in Dinette (cm)	216x87(54)		212x54		212x54		212x54		212x100		198x92		212 x 113 (50)		216 x 90 (50)		216x83
Overcab bed (cm)/ Elevating Bed (cm)	- / 190x116(95)		- / 190x128(107)		- / 190x128(107)		- / 190x128(107)		- / 190x128(107)		- / 190x95		- /190x116(95)		- / 190x128(107)		- / 190x133(124)
Additional seat rear bed	S		S		S		S		S		-		-		-		-
Rear bed height adjustment	-		-		-		-		-		-		S		S		S
Locker (useful opening, cm)	117x87(72) / 117x87(72)		117x87(72) / 117x87(72)		117x87 (72)- 100x67 / 117x87 (72)- 107x60		72x87(72) / 72x87(72)		117x87(72) / 117x87(72)		117x60 / 117x60		130x102(72) / 100x67		130x102(72) / 130x102(72)		130x102(72) / 130x102(72)
Max. internal garage height (mm)	126		119		119		75		120		128		130		130		130
Floor / walls / roof thickness (mm)	54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31
Floor / walls / roof material (mm)	VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR
Fiberglass roof, hail-proof	S		S		S		S		S		S		S		S		S
INSTALLATIONS																	
Burners / Gas oven / Suction hood	3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -
Tank capacity: clear water / wastewater (L**)	(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100
Automatic trivalent fridge (220V, 12V, gas) (L)	140		140		140		140		140		140		140		140		140
Standard heating system	Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W
SKYLIGHT																	
Panoramic roof (mm)	S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)
Rear skylight (mm)	400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)
Central skylight (mm)	400x400		400x400		400x400		400x400		400x400		400x400		400x400		400x400		400x400
Dinette skylight (mm)	-		-		-		-		-		-		-		-		-
Skylight toilette/shower (mm)	- / S		- / S		- / S		- / S		- / S		- / S		- / S		- / S		- / S

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

S= standard O=optional - = not available VTR= Fibreglas

Standard equipment

- ▶ Painted bumpers
- ▶ 16" wheels (FORD)
- ▶ Panoramic roof
- ▶ Solar panel
- ▶ Rear-view camera
- ▶ Door with fixed window
- ▶ Entrance door flyscreen
- ▶ ESC (FIAT) ESP (FORD)
- ▶ Integrated Radio DAB aerial and Bluetooth radio with controls on steering wheel
- ▶ Manual climate control system
- ▶ Driver and passenger airbags
- ▶ Cruise control
- ▶ Swivel seats with seat covers
- ▶ Slatted bed
- ▶ 6-year warranty against infiltrations





	271 M	277 M	279 M	284 M	290 M	291 M	295 M
--	-------	-------	-------	-------	-------	-------	-------

MECHANICS AND CHASSIS													
Mechanical unit	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit
Engine, Power hp	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP
Maximum technically permissible weight (Kg)	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500
Weight unladen in running conditions (Kg)	2955 / 3002	2920 / 2990	2890 / 2907	2878 / 2907	2935 / 2992	2908 / 2992	3025 / 3072	2998 / 3072	3015 / 3072	3008 / 3072	2955 / 3162	2920 / 3170	2935 / 2992
Pay Load (Kg)	498 / 545	510 / 580	593 / 610	593 / 622	508 / 565	508 / 592	428 / 475	428 / 502	428 / 485	428 / 492	338 / 545	580 / 330	508 / 565
Wheelbase (mm)	3450	4035	3954	4035	3750	4035	3954	4035	3954	4035	3300	3450	3750
Motorhome weight plus trailer (kg)	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5065
Wheels dimensions	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"
DIMENSIONS AND PLACES													
External lenght (mm) / External width (mm)	5990 / 2350		6990 / 2350		6990 / 2350		7450 / 2350		7450 / 2350		5995 / 2300		6995 / 2300
External height(mm) / Internal height (mm)	3200 / 2080		3200 / 2080		3200 / 2080		3200 / 2080		3200 / 2080		3200 / 2080		3200 / 2080
Homologated seats	6		7		6		5		5		4		6
Berths (optional dinette)	6		7		8		4 (5 0)		4 (5 0)		4 (0 5)		6
Auxiliary bed in dinette	-		-		-		0		0		0		S
Rear Bed (cm)	215x76 - 215x76		212x80 / 212x80		216x130(112) / 210x110		215x80 (206) - 197x80		212x189		213x125(118)		215X130 (112)
Dimensions Auxiliary bed in Dinette (cm)	177x125		186x125/163x65		186x125		212x54		212x113(50)		198x92		186x125
Overcab bed (cm)/ Elevating Bed (cm)	209x160 / -		209x160 / -		209x160 / -		209x160 / -		209x160 / -		209x160 / -		209x160 / -
Additional seat rear bed	-		-		-		S		-		-		-
Rear bed height adjustment	-		-		-		-		-		-		S
Locker (useful opening, cm)	110x63 - 110x50		107x60 / 107x60		130x 102(72) / 130x102(72)		117x87(72) / 117x87(72)		132x137 / 132x137		117x60 - 117x60		130x102(72) / 130x102(72)
Max. internal garage height (mm)	95		130		130		130		143		128		135
Floor / walls / roof thickness (mm)	54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31
Floor / walls / roof material (mm)	VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR
Fiberglass roof, hail-proof	S		S		S		S		S		S		S
INSTALLATIONS													
Burners / Gas oven / Suction hood	3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -
Tank capacity: clear water / wastewater (L**)	(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100
Automatic trivalent fridge (220V, 12V, gas) (L)	140		140		140		140		140		140		140
Standard heating system	Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W
SKYLIGHT													
Panoramic roof (mm)	0 (800x600)		0 (800x600)		0 (800x600)		0 (800x600)		0 (800x600)		0 (800x600)		0 (800x600)
Rear skylight (mm)	400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)
Central skylight (mm)	-		-		-		-		-		-		-
Dinette skylight (mm)	400x400		400x400		400x400		400x400		400x400		400x400		400x400
Skylight toilette/shower (mm)	- / S		- / S		- / S		- / S		- / S		- / S		- / S

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

S= standard O=optional - = not available VTR= Fiberglas

Standard equipment

- ▶ Painted bumpers
- ▶ 16" wheels (FORD)
- ▶ Solar panel
- ▶ Rear-view camera
- ▶ Door with fixed window
- ▶ Entrance door flyscreen
- ▶ ESC (FIAT) ESP (FORD)
- ▶ Integrated Radio DAB aerial and Bluetooth radio with controls on steering wheel
- ▶ Manual climate control system
- ▶ Driver and passenger airbags
- ▶ Cruise control
- ▶ Swivel seats with seat covers (where available)
- ▶ Slatted bed
- ▶ 6-year warranty against infiltrations





	265 Integral	267 Integral	274 Integral	284 Integral	287 Integral
MECHANICS AND CHASSIS					
Mechanical unit	Fiat Ducato	Fiat Ducato	Fiat Ducato	Fiat Ducato	Fiat Ducato
Engine, Power hp	2.3MJ 120HP	2.3MJ 120HP	2.3MJ 120HP	2.3MJ 120HP	2.3MJ 120HP
Maximum technically permissible weight (Kg)	3500	3500	3500	3500	3500
Weight unladen in running conditions (Kg)	2968 / 3072	2978 / 3157	2923 / 2988	2968 / 3072	2978 / 3157
Pay Load (Kg)	428 / 532	343 / 532	512 / 577	428 / 532	343 / 522
Wheelbase (mm)	4035	4035	4035	4035	4035
Motorhome weight plus trailer (kg)	5500	5500	5500	5500	5500
Wheels dimensions	15"	15"	15"	15"	15"
DIMENSIONS AND PLACES					
External lenght (mm) / External width (mm)	7450 / 2350	7450 / 2350	7300 / 2350	7450 / 2350	6970 / 2350
External height(mm) / Internal height (mm)	2950 / 2080	2950 / 2080	2950 / 2080	2950 / 2080	2950 / 2080
Homologated seats	5	4	6	5	4
Berths (optional dinette)	4 (5 0)	4 (5 0)	6	4 (0 5)	4 (5 0)
Auxiliary bed in dinette	0	0	-	0	0
Rear Bed (cm)	190x150	190x150	216x100(840) – 216x100(840)	220x80 – 194x80	200x80 – 215x80
Dimensions Auxiliary bed in Dinette (cm)	212x54	212x100	200x62 - 189x65	212x54	212x100
Overcab bed (cm)/ Elevating Bed (cm)	- / 185x134	- / 185x134	- / 185x134	- / 185x134	- / 185x134
Additional seat rear bed	-	-	-	-	S
Rear bed height adjustment	-	-	-	-	-
Locker (useful opening, cm)	117x87(72) / 72x87(72)	117x 87(72) / 72x87(72)	100x67 / 100x67	117x87(72) / 117x87(72)	117x87(72) / 117x87(72)
Max. internal garage height (mm)	128	128	138	119	120
Floor / walls / roof thickness (mm)	54 / 31 / 31	54 / 31 / 31	54 / 31 / 31	54 / 31 / 31	54 / 31 / 31
Floor / walls / roof material (mm)	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR
Fiberglass roof, hail-proof	S	S	S	S	S
INSTALLATIONS					
Burners / Gas oven / Suction hood	3 / 0 / -	3 / 0 / -	3 / 0 / -	3 / 0 / -	3 / 0 / -
Tank capacity : clear water / wastewater (L**)	(20)100 / 100	(20)100 / 100	(20)100 / 100	(20)100 / 100	(20)100 / 100
Automatic trivalent fridge (220V, 12V, gas) (L)	140	140	140	140	140
Standard heating system	Gas Combi 4000 W	Gas Combi 4000 W	Gas Combi 4000 W	Gas Combi 4000 W	Gas Combi 4000 W
SKYLIGHT					
Panoramic roof (mm)	-	-	-	-	-
Rear skylight (mm)	400x400 (0 700x500)	400x400 (0 700x500)	400x400 (0 700x500)	400x400 (0 700x500)	400x400 (0 700x500)
Central skylight (mm)	400x400	-	400x400	700x500 (0 HEKI 3 960x655)	-
Dinette skylight (mm)	-	700x500 (0 HEKI 3 960x655)	-	-	700x500 (0 HEKI 3 960x655)
Skylight toilette/shower (mm)	- / S	- / S	- / S	- / S	- / S

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

S= standard O=optional - = not available VTR= Fiberglas

Standard equipment

- ▶ Solar panel
- ▶ Rear-view camera
- ▶ Door with fixed window
- ▶ Entrance door flyscreen
- ▶ ESC (FIAT)
- ▶ Integrated DAB radio aerial
- ▶ Manual climate control system
- ▶ Driver and passenger airbags
- ▶ Cruise control
- ▶ Swivel seats with seat covers (where available)
- ▶ Slatted bed
- ▶ 6-year warranty against infiltrations



Zefiro

Free to explore without compromise,
whatever the destination.

For those who are already familiar with the travelling holiday but are looking for a more attractive design and more complete equipment, yet at an affordable price.
A wide range of models, small and handy, ideal for 2 people or larger to accommodate up to 8 people. Choose from **30 models** and **3 types** between low-profile, overcab and full-integrated motorhomes, available on Ford and Fiat mechanics.



ZEFIRO
LOW-PROFILE

ZEFIRO
OVERCAB



ZEFIRO
FULL-INTEGRATED





Living area

- Choose your tailor-made dinette:
- Dinette with swivel seats that integrate into the living area
- Face to face dinette
- Double opposing dinette
- Coating for the lower part of the seat
- Large windows and skylight
- Table in polished laminate
- Folding top table
- Light wood furniture
- Ergonomic dinette seats
- Seat covers coordinated with the fabric upholstery
- Elevating bed panel with quilted fabric
- Floor hatch

Kitchen

- Choice between longitudinal and L-shaped
- Two-door refrigerator with bottle compartment for up to 140 l bottles
- Two or three-burner hob with glass cover
- Methacrylate panel
- Drawers with cutlery tray
- Extraction baskets
- Equipped wall for storage
- Glass or backlit mirror splash guard wall



Sleeping area

- Slatted beds
- Maxi central beds 190x150 cm
- Audio diffusion in the sleeping area
- Bed in dinette (where available)
- Breathable mattresses
- Windows and portlights for more light and ventilation
- Fabric-lined ceiling panel with storage pocket
- Side storage pockets



Bathroom

- Wooden furniture
- Large shower with double drain
- Large wall units
- Large mirrors with integrated lighting and portlight
- Rigid shower partition door
- Door separating the living area from the sleeping area



On-board technology

- 2 DIN radio with sound speakers in the sleeping area
- Perimeter Combi 4 gas heating
- Heating in the overcab area
- LED lighting
- Floor perimetral night-time courtesy lights
- LED spot lights under the wall units
- USB sockets in the living area
- 12 V-220 V electrical socket and TV socket in garage (Zefiro 290M)

Chassis

- Fiat Ducato 2.3 MJ 120 CV, emission class EURO 6
- DRL (day running light) headlights
- Driver and passenger airbags
- ESC (FIAT)
- ESP (FORD)
- 2 DIN radio with car play
- Manual climate control system
- Driver and passenger airbags
- Cruise control
- Integrated aerial
- Cab swivel seats

Exteriors

- Painted bumpers
- Open sky, panoramic roof (standard on low-profile motorhomes)
- Entrance door with fixed window and flyscreen
- 16" wheels (FORD)
- Seitz windows
- Opening band
- XXL garage with a maximum load capacity of 300 kg
- Rear-view camera with double eye
- 120 V solar panel
- 6-year infiltration warranty
- Outdoor audio broadcasting

Upholstery



Regal (Standard ■, Imitation Leather)



Oysterl (Optional □, Fabric/Imitation Leather)



Candra (Optional □, Fabric)



Lux (Optional □, Fabric/Imitation Leather)

ZEFIRO
LOW-PROFILE WITHOUT
ELEVATING BED



	261 P		265 P		266 P		267 P		282 P		283 P		284 P	
MECHANICS AND CHASSIS														
Mechanical unit	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato
Engine, Power hp	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP
Maximum technically permissible weight (Kg)	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500
Weight unladen in running conditions (Kg)	2965 /3162	2928 / 3162	3015 / 3072	2978 / 3072	3115 / 3157	3150 / 3160	3025 / 3157	2988 / 3157	3015 / 3072	3008 /3072	2935 / 3077	2898 / 3077	3015 / 3072	2978 / 3072
Pay Load (Kg)	338 / 535	338 / 572	428 / 485	428 / 522	385 / 343	350 / 340	343 /475	343 / 512	428 / 485	428 / 492	423 / 565	423 / 602	428 / 485	428 / 522
Wheelbase (mm)	3750	3800	3954	4035	3954	4035	3954	4035	3954	3800	3750	4035	3954	3800
Motorhome weight plus trailer (kg)	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500
Wheels dimensions	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"
DIMENSIONS AND PLACES														
External lenght (mm) / External width (mm)	6990 / 2350		7450 / 2350		7450 / 2350		7450 / 2350		7450 / 2350		6990 / 2350		7450 / 2350	
External height(mm) / Internal height (mm)	2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080	
Homologated seats	4		5		4		4		5		5		5	
Berths (optional dinette)	3		3		3		3		3		3		3	
Auxiliary bed in dinette	S		S		S		S		S		S		S	
Rear Bed (cm)	190x150		190x150		190x150		190x150		204x80 / 193x80		180x80 - 189x80		220x80 / 194x80	
Dimensions Auxiliary bed in Dinette (cm)	216x90(80)		212x54		216x101		212x100		212x50		216x87(54)		212x54	
Overcab bed (cm)/ Elevating Bed (cm)	- / -		- / -		- / 190x128(107)		- / -		- / -		- / -		- / -	
Additional seat rear bed	-		-		-		-		0		S		S	
Rear bed height adjustment	S		S		S		S		-		-		-	
Locker (useful opening, cm)	117x 87(72) / 72x87(72)		117x87(72) / 72x87(72)		117x87(72) / 72x87(72)		117x 87(72) / 72x87(72)		42x97 - 60x52 - 42x97		117x87(72) / 117x87(72)		117x87(72) / 117x87(72)	
Max. internal garage height (mm)	128		128		128		128		77		126		119	
Floor / walls / roof thickness (mm)	54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31	
Floor / walls / roof material (mm)	VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR	
Fiberglass roof, hail-proof	S		S		S		S		S		S		S	
INSTALLATIONS														
Burners / Gas oven / Suction hood	3 / 0 / -		3 / 0 / -		2 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -	
Tank capacity: clear water / wastewater (L**)	(20)100 / 120	(20)100 / 100	(20)100 / 120	(20)100 / 100	(20)100 / 120	(20)100 / 100	(20)100 / 120	(20)100 / 100	(20)100 / 120	(20)100 / 100	(20)100 / 120	(20)100 / 100	(20)100 / 120	(20)100 / 100
Automatic trivalent fridge (220V, 12V, gas) (L)	140		140		140		140		140		140		140	
Standard heating system	Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W	
SKYLIGHT														
Panoramic roof (mm)	S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)	
Rear skylight (mm)	400x400(0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)	
Central skylight (mm)	400x400		400x400		400x400		400x400		400x400		400x400		400x400	
Dinette skylight (mm)	-		-		-		-		-		-		-	
Skylight toilette/shower (mm)	- / S		- / S		- / S		- / S		- / S		- / S		- / S	

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.


S= standard O=optional - = not available VTR= Fiberglas

Standard equipment

- ▶ Painted bumpers
- ▶ 15" wheels
- ▶ Panoramic roof
- ▶ Solar panel
- ▶ Double-eye camera with parking function
- ▶ Door with fixed window
- ▶ Stowage band
- ▶ Entrance door flyscreen
- ▶ ESC (FIAT)
- ▶ Integrated DAB radio aerial
- ▶ 2 DIN radio with car play
- ▶ Internal and external audio diffusion using the walls as resonance boxes
- ▶ Floor hatch
- ▶ Manual climate control system
- ▶ Driver and passenger airbags
- ▶ Cruise control
- ▶ Swivel seats with seat covers
- ▶ Slatted bed
- ▶ 6-year warranty against infiltrations



ZEFIRO
LOW-PROFILE WITHOUT
ELEVATING BED

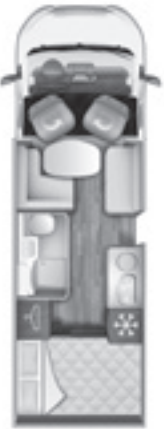

	285 P	286 P	287 P	291 P	294 P	295 P	298 P
--	-------	-------	-------	-------	-------	-------	-------

MECHANICS AND CHASSIS													
Mechanical unit	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit
Engine, Power hp	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP
Maximum technically permissible weight (Kg)	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500
Weight unladen in running conditions (Kg)	2935 / 3077	2898 / 3077	3015 / 3072	2978 / 3072	3025 / 3157	2988 / 3157	2935 / 3127	2900 / 3170	2885 / 3082	2848 / 3082	2925 / 3077	2968 / 3072	3005 / 3072
Pay Load (Kg)	423 / 565	423 / 602	428 / 485	428 / 522	343 / 457	343 / 512	373 / 565	600 / 330	418 / 615	418 / 652	428 / 495	428 / 532	428 / 495
Wheelbase (mm)	3750	3800	3954	4035	3954	4035	3300	3450	3300	3450	3954	4035	3954
Motorhome weight plus trailer (kg)	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5065
Wheels dimensions	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"
DIMENSIONS AND PLACES													
External lenght (mm) / External width (mm)	6990 / 2350		7450 / 2350		7450 / 2350		5995 / 2350		6470 / 2350		6990 / 2350		7450 / 2350
External height(mm) / Internal height (mm)	2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080
Homologated seats	5		5		4		4		5		5		5
Berths (optional dinette)	3		3		3		3		3		3		3
Auxiliary bed in dinette	S		S		S		S		S		S		S
Rear Bed (cm)	190x80 / 203x80		220x80 / 194x80		200x80 / 194x80		213x125(118)		216x135(118)		216x135(120)		207x129
Dimensions Auxiliary bed in Dinette (cm)	212x54		212x54		212x100		198x92		212 x 113 (50)		216 x 90 (50)		216x83
Overcab bed (cm)/ Elevating Bed (cm)	- / -		- / -		- / -		- / -		- / -		- / -		- / -
Additional seat rear bed	-		S		-		-		-		-		-
Rear bed height adjustment	-		-		-		-		S		S		S
Locker (useful opening, cm)	117x87(72) / 117x87(72)		72x87(72) / 72x87(72)		117x87(72) / 117x87(72)		117x60 / 117x60		130x102(72) / 100x67		130x102(72) / 130x102(72)		130x102(72) / 130x102(72)
Max. internal garage height (mm)	119		75		120		128		130		130		130
Floor / walls / roof thickness (mm)	54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31
Floor / walls / roof material (mm)	VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR
Fiberglass roof, hail-proof	S		S		S		S		S		S		S
INSTALLATIONS													
Burners / Gas oven / Suction hood	3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -
Tank capacity: clear water / wastewater (L**)	(20)100 / 120	(20)100 / 100	(20)100 / 120	(20)100 / 100	(20)100 / 120	(20)100 / 100	(20)100 / 120	(20)100 / 100	(20)100 / 120	(20)100 / 100	(20)100 / 120	(20)100 / 100	(20)100 / 120
Automatic trivalent fridge (220V, 12V, gas) (L)	140		140		140		140		140		140		140
Standard heating system	Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W
SKYLIGHT													
Panoramic roof (mm)	S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)
Rear skylight (mm)	400x400 (O 700x500)		400x400 (O 700x500)		400x400 (O 700x500)		400x400 (O 700x500)		400x400 (O 700x500)		400x400 (O 700x500)		400x400 (O 700x500)
Central skylight (mm)	400x400		400x400		400x400		400x400		400x400		400x400		400x400
Dinette skylight (mm)	-		-		-		-		-		-		-
Skylight toilette/shower (mm)	- / S		- / S		- / S		- / S		- / S		- / S		- / S

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

S= standard O=optional - = not available VTR= Fiberglas

Standard equipment

- ▶ Painted bumpers
- ▶ 15" wheels
- ▶ Panoramic roof
- ▶ Solar panel
- ▶ Double-eye camera with parking function
- ▶ Door with fixed window
- ▶ Stowage band
- ▶ Entrance door flyscreen
- ▶ ESC (FIAT)
- ▶ Integrated DAB radio aerial
- ▶ 2 DIN radio with car play
- ▶ Internal and external audio diffusion using the walls as resonance boxes
- ▶ Floor hatch
- ▶ Manual climate control system
- ▶ Driver and passenger airbags
- ▶ Cruise control
- ▶ Swivel seats with seat covers
- ▶ Slatted bed
- ▶ 6-year warranty against infiltrations



ZEFIRO
LOW-PROFILE WITH
ELEVATING BED



	230 TL	234 TL	261 TL	265 TL	266 TL	267 TL	268 TL	274 TL	282 TL
--	--------	--------	--------	--------	--------	--------	--------	--------	--------

MECHANICS AND CHASSIS																	
Mechanical unit	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit
Engine, Power hp	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP
Maximum technically permissible weight (Kg)	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500
Weight unladen in running conditions (Kg)	2935 / 3169	2898 / 3169	3015 / 3115	2980 / 3080	2965 /3162	2928 / 3162	3015 / 3072	2978 / 3072	3115 / 3157	3150 / 3160	3025 / 3157	2988 / 3157	3055 / 3157	3018 / 3157	2945 / 2988	2923 / 2988	3015 / 3072
Pay Load (Kg)	331 / 565	331 / 602	485 / 385	520 / 420	338 / 535	338 / 572	428 / 485	428 / 522	385 / 343	350 / 340	343 / 475	343 / 512	343 / 445	343 / 482	512 / 555	512 / 577	428 / 485
Wheelbase (mm)	3954	4035	3750	3800	3750	3800	3954	4035	3954	4035	3954	4035	3954	4035	3954	4035	3800
Motorhome weight plus trailer (kg)	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5500
Wheels dimensions	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	15"
DIMENSIONS AND PLACES																	
External lenght (mm) / External width (mm)	6200 / 2350		6990 / 2350		6990 / 2350		7450 / 2350		7450 / 2350		7450 / 2350		7430 / 2350		7330 / 2350		7430 / 2350
External height(mm) / Internal height (mm)	2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080
Homologated seats	4		4		4		4		5		5		4		6		5
Berths (optional dinette)	4		4		4 (5 0)		4 (5 0)		4 (5 0)		4 (5 0)		4		6		4 (5 0)
Auxiliary bed in dinette	S		S		0		0		0		0		S		S		0
Rear Bed (cm)	210x70		210x70		190x150		190x150		190x150		190x150		190x150		216x100(84) / 216x100(84)		204x80 / 193x80
Dimensions Auxiliary bed in Dinette (cm)	216x77		216x125		216x90(80)		212x54		216x101		212x100		-		200x62 / 189x65		212x50
Overcab bed (cm)/ Elevating Bed (cm)	- / 190 x 148(123)		- / 190x160		- / 190x116(95)		- /190x128(107)		- / 190x128(107)		- /190x128(107)		- / 190x128(107)		- / 190x133(124)		- / 190x128(107)
Additional seat rear bed	-		-		-		-		-		-		-		-		0
Rear bed height adjustment	-		-		S		S		S		S		-		-		-
Locker (useful opening, cm)	147x67 / 100x67		147x67 / 100x67		117x 87(72) / 72x87(72)		117x87(72) / 72x87(72)		117x87(72) / 72x87(72)		117x 87(72) / 72x87(72)		117x87x(72) / 40x87(72)		100x67 / 100x67		42x97 - 60x52 - 42x97
Max. internal garage height (mm)	130		130		128		128		128		128		120		138		77
Floor / walls / roof thickness (mm)	54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31
Floor / walls / roof material (mm)	VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR
Fiberglass roof, hail-proof	S		S		S		S		S		S		S		S		S
INSTALLATIONS																	
Burners / Gas oven / Suction hood	3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		2 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -
Tank capacity: clear water / wastewater (L**)	(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100
Automatic trivalent fridge (220V, 12V, gas) (L)	140		140		140		140		140		140		90		140		140
Standard heating system	Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W
SKYLIGHT																	
Panoramic roof (mm)	S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)
Rear skylight (mm)	400x400		400x400		400x400(0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)
Central skylight (mm)	400x400 (0 700x500)		400x400 (0 700x500)		400x400		400x400		400x400		400x400		400x400		400x400		400x400
Dinette skylight (mm)	-		-		-		-		-		-		-		-		-
Skylight toilette/shower (mm)	- / S		- / S		- / S		- / S		- / S		- / S		- / S		- / S		- / S

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.


S= standard O=optional - = not available VTR= Fiberglas

Standard equipment

- ▶ Painted bumpers
- ▶ 15" wheels
- ▶ Panoramic roof
- ▶ Solar panel
- ▶ Double-eye camera with parking function
- ▶ Door with fixed window
- ▶ Stowage band
- ▶ Entrance door flyscreen
- ▶ ESC (FIAT)
- ▶ Integrated DAB radio aerial
- ▶ 2 DIN radio with car play
- ▶ Internal and external audio diffusion using the walls as resonance boxes
- ▶ Floor hatch
- ▶ Manual climate control system
- ▶ Driver and passenger airbags
- ▶ Cruise control
- ▶ Swivel seats with seat covers
- ▶ Slatted bed
- ▶ 6-year warranty against infiltrations



ZEFIRO
LOW-PROFILE WITH
ELEVATING BED

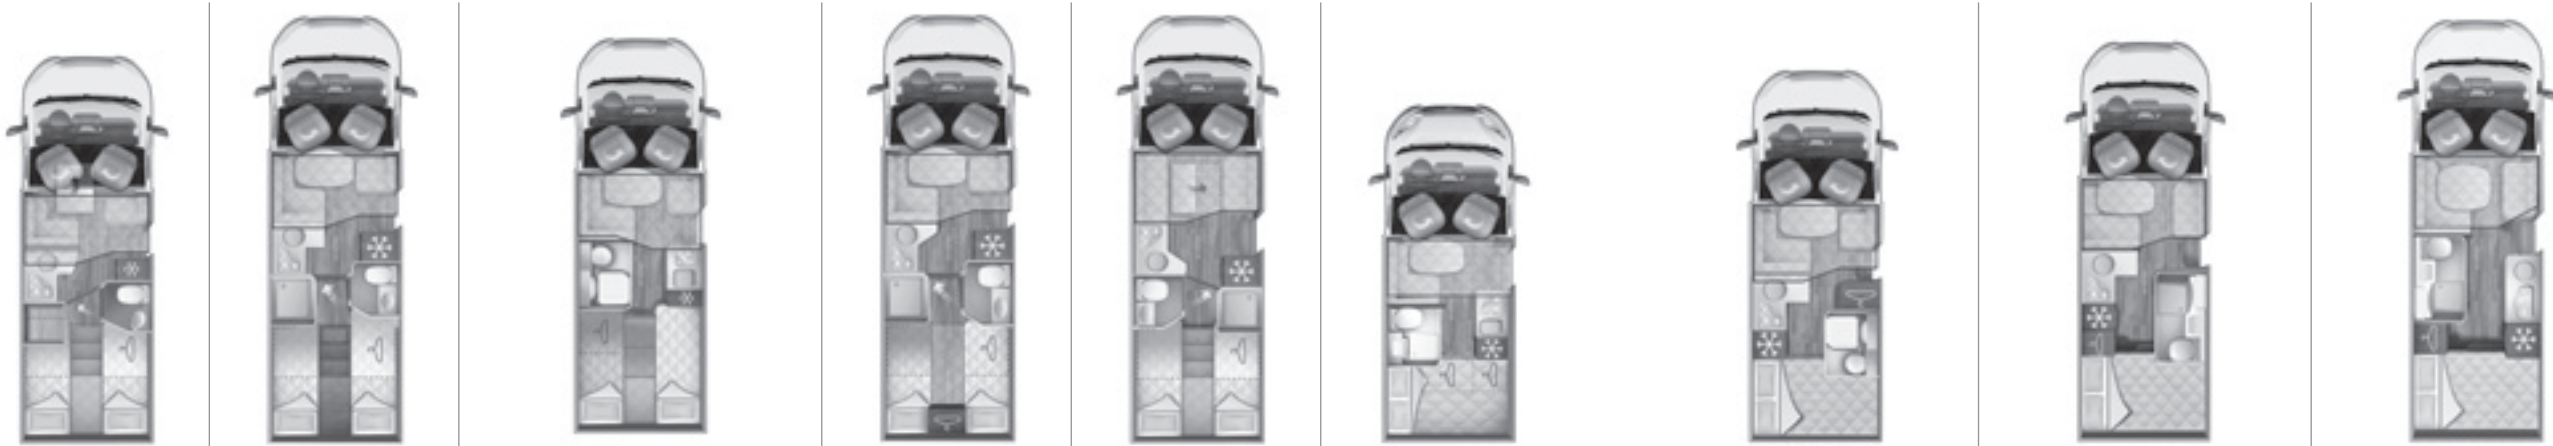

	283 TL	284 TL	285 TL	286 TL	287 TL	291 TL	294 TL	295 TL	298 TL
--	--------	--------	--------	--------	--------	--------	--------	--------	--------

MECHANICS AND CHASSIS																	
Mechanical unit	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit
Engine, Power hp	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP
Maximum technically permissible weight (Kg)	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500
Weight unladen in running conditions (Kg)	2935 / 3077	2898 / 3077	3015 / 3072	2978 / 3072	2935 / 3077	2898 / 3077	3015 / 3072	2978 / 3072	3025 / 3157	2988 / 3157	2935 / 3127	2900 / 3170	2885 / 3082	2848 / 3082	2925 / 3077	2888 / 3077	3005 / 3072
Pay Load (Kg)	423 / 565	423 / 602	428 / 485	428 / 522	423 / 565	423 / 602	428 / 485	428 / 522	343 / 457	343 / 512	373 / 565	600 / 330	418 / 615	418 / 652	423 / 575	423 / 612	428 / 495
Wheelbase (mm)	3750	4035	3954	3800	3750	3800	3954	4035	3954	4035	3300	3450	3300	3450	3750	3800	3954
Motorhome weight plus trailer (kg)	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5500
Wheels dimensions	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"
DIMENSIONS AND PLACES																	
External lenght (mm) / External width (mm)	6990 / 2350		7450 / 2350		6990 / 2350		7450 / 2350		7450 / 2350		5990 / 2350		6470 / 2350		6990 / 2350		7450 / 2350
External height(mm) / Internal height (mm)	2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080
Homologated seats	5		5		5		5		4		4		5		5		5
Berths (optional dinette)	4 (5 0)		4 (5 0)		4 (5 0)		4 (5 0)		4 (0 5)		4		4 (5 0)		4 (5 0)		4 (5 0)
Auxiliary bed in dinette	0		0		0		0		0		-		0		0		0
Rear Bed (cm)	180x80 - 189x80		220x80 / 194x80		199x80 - 186x80		220x80 / 194x80		200x80 / 194x80		213x125(118)		216x135(118)		216x135(120)		207x129
Dimensions Auxiliary bed in Dinette (cm)	216x87(54)		212x54		212x54		212x54		212x100		198x92		212 x 113 (50)		216 x 90 (50)		216x83
Overcab bed (cm)/ Elevating Bed (cm)	- / 190x116(95)		- / 190x128(107)		- / 190x128(107)		- / 190x128(107)		- / 190x128(107)		- / 190x95		- /190x116(95)		- / 190x128(107)		- / 190x133(124)
Additional seat rear bed	S		S		S		S		-		-		-		-		-
Rear bed height adjustment	-		-		-		-		-		-		S		S		S
Locker (useful opening, cm)	117x87(72) / 117x87(72)		117x87(72) / 117x87(72)		117x87 (72)-100x67 / 117x87 (72)-107x60		72x87(72) / 72x87(72)		117x87(72) / 117x87(72)		117x60 / 117x60		130x102(72) / 100x67		130x102(72) / 130x102(72)		130x102(72) / 130x102(72)
Max. internal garage height (mm)	126		119		75		120		128		130		130		130		130
Floor / walls / roof thickness (mm)	54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31
Floor / walls / roof material (mm)	VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR
Fiberglass roof, hail-proof	S		S		S		S		S		S		S		S		S
INSTALLATIONS																	
Burners / Gas oven / Suction hood	3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -
Tank capacity: clear water / wastewater (L**)	(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100
Automatic trivalent fridge (220V, 12V, gas) (L)	140		140		140		140		140		140		140		140		140
Standard heating system	Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W
SKYLIGHT																	
Panoramic roof (mm)	S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)
Rear skylight (mm)	400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)
Central skylight (mm)	400x400		400x400		400x400		400x400		400x400		400x400		400x400		400x400		400x400
Dinette skylight (mm)	-		-		-		-		-		-		-		-		-
Skylight toilette/shower (mm)	- / S		- / S		- / S		- / S		- / S		- / S		- / S		- / S		- / S

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

S= standard O=optional - = not available VTR= Fiberglass

Standard equipment

- ▶ Painted bumpers
- ▶ 15" wheels
- ▶ Panoramic roof
- ▶ Solar panel
- ▶ Double-eye camera with parking function
- ▶ Door with fixed window
- ▶ Stowage band
- ▶ Entrance door flyscreen
- ▶ ESC (FIAT)
- ▶ Integrated DAB radio aerial
- ▶ 2 DIN radio with car play
- ▶ Internal and external audio diffusion using the walls as resonance boxes
- ▶ Floor hatch
- ▶ Manual climate control system
- ▶ Driver and passenger airbags
- ▶ Cruise control
- ▶ Swivel seats with seat covers
- ▶ Slatted bed
- ▶ 6-year warranty against infiltrations





	271 M	277 M	279 M	284 M	290 M	291 M	295 M
--	-------	-------	-------	-------	-------	-------	-------

MECHANICS AND CHASSIS													
Mechanical unit	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit
Engine, Power hp	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP	2.3MJ 120HP	2.0TDI 130HP
Maximum technically permissible weight (Kg)	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500
Weight unladen in running conditions (Kg)	2955 / 3002	2920 / 2990	2890 / 2907	2878 / 2907	2935 / 2992	2908 / 2992	3025 / 3072	2998 / 3072	3015 / 3072	3008 / 3072	2955 / 3162	2920 / 3170	2935 / 2992
Pay Load (Kg)	498 / 545	512 / 580	593 / 610	593 / 622	508 / 565	508 / 592	428 / 475	428 / 502	428 / 485	428 / 492	338 / 545	580 / 330	508 / 565
Wheelbase (mm)	3450	4035	3954	4035	3750	4035	3954	4035	3954	4035	3300	3450	3750
Motorhome weight plus trailer (kg)	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5065
Wheels dimensions	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"
DIMENSIONS AND PLACES													
External lenght (mm) / External width (mm)	5990 / 2350		6990 / 2350		6990 / 2350		7450 / 2350		7450 / 2350		5995 / 2300		6995 / 2300
External height(mm) / Internal height (mm)	3200 / 2080		3200 / 2080		3200 / 2080		3200 / 2080		3200 / 2080		3200 / 2080		3200 / 2080
Homologated seats	6		7		6		5		5		4		6
Berths (optional dinette)	6		7		8		4 (5 0)		4 (5 0)		4 (0 5)		6
Auxiliary bed in dinette	-		-		-		0		0		0		S
Rear Bed (cm)	215x76 - 215x76		212x80 / 212x80		216x130(112) / 210x110		215x80 (206) - 197x80		212x189		213x125(118)		215X130 (112)
Dimensions Auxiliary bed in Dinette (cm)	177x125		186x125/163x65		186x125		212x54		212x113(50)		198x92		186x125
Overcab bed (cm)/ Elevating Bed (cm)	209x160 / -		209x160 / -		209x160 / -		209x160 / -		209x160 / -		209x160 / -		209x160 / -
Additional seat rear bed	-		-		-		S		-		-		S
Rear bed height adjustment	-		-		-		-		-		-		-
Locker (useful opening, cm)	110x63 - 110x50		107x60 / 107x60		130x 102(72) / 130x102(72)		117x87(72) / 117x87(72)		132x137 / 132x137		117x60 - 117x60		130x102(72) / 130x102(72)
Max. internal garage height (mm)	95		130		130		130		143		128		135
Floor / walls / roof thickness (mm)	54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31
Floor / walls / roof material (mm)	VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR
Fiberglass roof, hail-proof	S		S		S		S		S		S		S
INSTALLATIONS													
Burners / Gas oven / Suction hood	3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -
Tank capacity: clear water / wastewater (L**)	(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100
Automatic trivalent fridge (220V, 12V, gas) (L)	140		140		140		140		140		140		140
Standard heating system	Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W
SKYLIGHT													
Panoramic roof (mm)	0 (800x600)		0 (800x600)		0 (800x600)		0 (800x600)		0 (800x600)		0 (800x600)		0 (800x600)
Rear skylight (mm)	400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)
Central skylight (mm)	-		-		-		-		-		-		-
Dinette skylight (mm)	400x400		400x400		400x400		400x400		400x400		400x400		400x400
Skylight toilette/shower (mm)	- / S		- / S		- / S		- / S		- / S		- / S		- / S

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

S= standard O=optional - = not available VTR= Fiberglas

Standard equipment

- ▶ Painted bumpers
- ▶ 15" wheels
- ▶ Solar panel
- ▶ Double-eye camera with parking function
- ▶ Door with fixed window
- ▶ Stowage band
- ▶ Entrance door flyscreen
- ▶ ESC (FIAT)
- ▶ Integrated DAB radio aerial
- ▶ 2 DIN radio with car play
- ▶ Internal and external audio diffusion using the walls as resonance boxes
- ▶ Floor hatch
- ▶ Manual climate control system
- ▶ Driver and passenger airbags
- ▶ Cruise control
- ▶ Swivel seats with seat covers
- ▶ Slatted bed
- ▶ 6-year warranty against infiltrations





	265 Integral	267 Integral	274 Integral	284 Integral	287 Integral
MECHANICS AND CHASSIS					
Mechanical unit	Fiat Ducato	Fiat Ducato	Fiat Ducato	Fiat Ducato	Fiat Ducato
Engine, Power hp	2.3MJ 120HP	2.3MJ 120HP	2.3MJ 120HP	2.3MJ 120HP	2.3MJ 120HP
Maximum technically permissible weight (Kg)	3500	3500	3500	3500	3500
Weight unladen in running conditions (Kg)	2968 / 3072	2978 / 3157	2923 / 2988	2968 / 3072	2978 / 3157
Pay Load (Kg)	428 / 532	343 / 532	512 / 577	428 / 532	343 / 522
Wheelbase (mm)	4035	4035	4035	4035	4035
Motorhome weight plus trailer (kg)	5500	5500	5500	5500	5500
Wheels dimensions	15"	15"	15"	15"	15"
DIMENSIONS AND PLACES					
External lenght (mm) / External width (mm)	7450 / 2350	7450 / 2350	7300 / 2350	7450 / 2350	6970 / 2350
External height(mm) / Internal height (mm)	2950 / 2080	2950 / 2080	2950 / 2080	2950 / 2080	2950 / 2080
Homologated seats	5	4	6	5	4
Berths (optional dinette)	4 (5 0)	4 (5 0)	6	4 (0 5)	4 (5 0)
Auxiliary bed in dinette	0	0	-	0	0
Rear Bed (cm)	190x150	190x150	216x100(840) – 216x100(840)	220x80 – 194x80	200x80 – 215x80
Dimensions Auxiliary bed in Dinette (cm)	212x54	212x100	200x62 - 189x65	212x54	212x100
Overcab bed (cm)/ Elevating Bed (cm)	- / 185x134	- / 185x134	- / 185x134	- / 185x134	- / 185x134
Additional seat rear bed	-	-	-	-	S
Rear bed height adjustment	-	-	-	-	-
Locker (useful opening, cm)	117x87(72) / 72x87(72)	117x 87(72) / 72x87(72)	100x67 / 100x67	117x87(72) / 117x87(72)	117x87(72) / 117x87(72)
Max. internal garage height (mm)	128	128	138	119	120
Floor / walls / roof thickness (mm)	54 / 31 / 31	54 / 31 / 31	54 / 31 / 31	54 / 31 / 31	54 / 31 / 31
Floor / walls / roof material (mm)	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR
Fiberglass roof, hail-proof	S	S	S	S	S
INSTALLATIONS					
Burners / Gas oven / Suction hood	3 / 0 / -	3 / 0 / -	3 / 0 / -	3 / 0 / -	3 / 0 / -
Tank capacity: clear water / wastewater (L**)	(20)100 / 100	(20)100 / 100	(20)100 / 100	(20)100 / 100	(20)100 / 100
Automatic trivalent fridge (220V, 12V, gas) (L)	140	140	140	140	140
Standard heating system	Gas Combi 4000 W	Gas Combi 4000 W	Gas Combi 4000 W	Gas Combi 4000 W	Gas Combi 4000 W
SKYLIGHT					
Panoramic roof (mm)	-	-	-	-	-
Rear skylight (mm)	400x400 (0 700x500)	400x400 (0 700x500)	400x400 (0 700x500)	400x400 (0 700x500)	400x400 (0 700x500)
Central skylight (mm)	400x400	-	400x400	700x500 (0 HEKI 3 960x655)	-
Dinette skylight (mm)	-	700x500 (0 HEKI 3 960x655)	-	-	700x500 (0 HEKI 3 960x655)
Skylight toilette/shower (mm)	- / S	- / S	- / S	- / S	- / S

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

S= standard O=optional - = not available VTR= Fiberglas

Standard equipment

- ▶ 15" wheels
- ▶ Panoramic roof
- ▶ Solar panel
- ▶ Double-eye camera with parking function
- ▶ Door with fixed window
- ▶ Stowage band
- ▶ Entrance door flyscreen
- ▶ ESC (FIAT)
- ▶ Integrated DAB radio aerial
- ▶ 2 DIN radio with car play
- ▶ Internal and external audio diffusion using the walls as resonance boxes
- ▶ Floor hatch
- ▶ Manual climate control system
- ▶ Driver and passenger airbags
- ▶ Cruise control
- ▶ Swivel seats with seat covers
- ▶ Slatted bed
- ▶ 6-year warranty against infiltrations



Granduca

The world at your fingertips.
You won't miss home.

For the more experienced traveller, always looking for vehicles with plenty of stowage, that are elegant, technological and reliable with excellent and ultra comfortable equipment, at profitable prices.

A range of low-profile motorhomes selected in three layouts, depending on the type of bed. Choose between central, twin or transversal bed. Available on Fiat mechanics.

GRANDUCA
LOW-PROFILE





Exteriors

- Painted bumpers
- Open sky, panoramic roof (standard on low-profile motorhomes)
- XL door with central locking in two points
- Seitz windows
- Technical double flooring
- XXL garage with a maximum load capacity of 300 kg
- Rear-view camera
- 120 V solar panel
- 6-year infiltration warranty

Living area

- Dinette with swivel seats that integrate into the living area
- Face to face dinette
- Dark wood furniture
- Large windows and skylight
- Table in polished laminate
- Folding top table
- Ergonomic dinette seats
- Seat covers coordinated with the fabric upholstery
- Floor hatch
- Soft touch ceiling

Kitchen

- Choice between longitudinal and L-shaped
- Two-door refrigerator with bottle compartment for up to 150 l bottles
- Three-burner hob with glass cover
- Methacrylate panel
- Drawers with cutlery tray
- Extraction baskets
- LED lighting under the kitchen top and in the perimeter part of the external profile.

Sleeping area

- Slatted beds
- Maxi central beds 190x150 cm
- Bed in dinette (where available)
- Breathable mattresses
- Windows and portlights for more light and ventilation
- Fabric-lined ceiling panel with storage pocket
- Side storage pockets

Bathroom

- Wooden furniture
- Large shower with double drain
- Large wall units
- Large mirrors with integrated lighting and portlight
- Rigid shower partition door
- Door separating the living area from the sleeping area

On-board technology

- 2 DIN radio with sound speakers in the sleeping area
- Perimeter Combi 4 gas heating
- LED lighting
- Floor perimetral night-time courtesy lights
- LED spot lights under the wall units
- USB sockets in the living area

Chassis

- Fiat Ducato 2.3 MJ 120 CV, emission class EURO 6
- DRL (day running light) headlights
- Driver and passenger airbags
- ESC (FIAT)
- 2 DIN radio with car play
- Manual climate control system
- Driver and passenger airbags
- Cruise control
- Integrated DAB radio aerial
- Cab swivel seats

Upholstery



Pazal (Standard ■, Fabric/Imitation Leather)

GRANDUCA
LOW-PROFILE WITHOUT
ELEVATING BED



GRANDUCA
LOW-PROFILE
WITH ELEVATING BED



	267 P	287 P	298 P	267 TL	287 TL	298 TL
MECHANICS AND CHASSIS						
Mechanical unit	Fiat Ducato	Fiat Ducato	Fiat Ducato	Fiat Ducato	Fiat Ducato	Fiat Ducato
Engine, Power hp	2.3MJ 120HP	2.3MJ 120HP	2.3MJ 120HP	2.3MJ 120HP	2.3MJ 120HP	2.3MJ 120HP
Maximum technically permissible weight (Kg)	3500	3500	3500	3500	3500	3500
Weight unladen in running conditions (Kg)	3103 / 3157	3103 / 3157	3103 / 3157	3103 / 3157	3103 / 3157	3103 / 3157
Pay Load (Kg)	343 /397	343 /397	343 /397	343 /397	343 /397	343 /397
Wheelbase (mm)	4035	4035	4035	4035	4035	4035
Motorhome weight plus trailer (kg)	5500	5500	5500	5500	5500	5500
Wheels dimensions	15"	15"	15"	15"	15"	15"
DIMENSIONS AND PLACES						
External lenght (mm) / External width (mm)	7450 / 2350	7450 / 2350	7450 / 2350	7450 / 2350	7450 / 2350	7450 / 2350
External height(mm) / Internal height (mm)	3050 / 2080	3050 / 2080	3050 / 2080	3050 / 2080	3050 / 2080	3050 / 2080
Homologated seats	4	4	4	4	4	4
Berths (optional dinette)	3	3	3	4 (0 5)	4 (0 5)	4 (0 5)
Auxiliary bed in dinette	S	S	S	0	0	0
Rear Bed (cm)	190x150	194x80 – 194x80	215x135	190x150	194x80 – 194x80	215x135
Dimensions Auxiliary bed in Dinette (cm)	216x86	216x86	216x86	216x86	216x86	216x86
Overcab bed (cm)/ Elevating Bed (cm)	- / 190x128(107)	- / 190x128 (107)	- / 190x133(124)	- / 190x128(107)	- / 190x128(107)	- / 190x133(124)
Additional seat rear bed	-	S	-	-	S	-
Rear bed height adjustment	-	-	-	-	-	-
Locker (useful opening, cm)	117x87(72) / 117x 87(72)	117x87(72) / 117x 87(72)	130x102(72) / 130x102(72)	117x87(72) / 117x 87(72)	117x87(72) / 117x 87(72)	130x102(72) / 130x102(72)
Max. internal garage height (mm)	122	119	135	122	119	135
Floor / walls / roof thickness (mm)	38 - 22 / 31 / 31	38 - 22 / 31 / 31	38 - 22 / 31 / 31	38 - 22 / 31 / 31	38 - 22 / 31 / 31	38 - 22 / 31 / 31
Floor / walls / roof material (mm)	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR
Fiberglass roof, hail-proof	S	S	S	S	S	S
INSTALLATIONS						
Burners / Gas oven / Suction hood	3 / 0 / -	3 / 0 / -	3 / 0 / -	3 / 0 / -	3 / 0 / -	3 / 0 / -
Tank capacity: clear water / wastewater (L**)	(20)80 / 80	(20)80 / 80	(20)80 / 80	(20)80 / 80	(20)80 / 80	(20)80 / 80
Automatic trivalent fridge (220V, 12V, gas) (L)	150	150	150	150	150	150
Standard heating system	Gas Combi 4000 W	Gas Combi 4000 W	Gas Combi 4000 W	Gas Combi 4000 W	Gas Combi 4000 W	Gas Combi 4000 W
SKYLIGHT						
Panoramic roof (mm)	S (1000x800)	S (1000x800)	S (1000x800)	S (1000x800)	S (1000x800)	S (1000x800)
Rear skylight (mm)	400x400 (0 700x500)	400x400 (0 700x500)	400x400 (0 700x500)	400x400 (0 700x500)	400x400 (0 700x500)	400x400 (0 700x500)
Central skylight (mm)	400x400	400x400	400x400	400x400	400x400	400x400
Dinette skylight (mm)	700x500	700x500	700x500	-	-	-
Skylight toilette/shower (mm)	-	-	S	-	-	S

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

S= standard O=optional - = not available VTR= Fiberglas

Standard equipment

- ▶ Painted bumpers
- ▶ 15" wheels
- ▶ Panoramic roof
- ▶ Solar panel
- ▶ Rear-view camera
- ▶ Two-point XL door with central locking
- ▶ Entrance door flyscreen
- ▶ ESC (FIAT)
- ▶ Integrated DAB radio aerial
- ▶ Floor hatch
- ▶ Manual climate control system
- ▶ Driver and passenger airbags
- ▶ Cruise control
- ▶ Swivel seats with seat covers
- ▶ Slatted bed
- ▶ 6-year warranty against infiltrations



NOTES
MASS IN RUNNING ORDER. It includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and a gas tank for living purposes (20 kg). The mass in running order, and consequently the payload and/or certified seats may vary depending on the accessories installed.

PAYLOAD. This consists of the difference between the maximum technically permissible laden mass and the mass in running order. It includes elements for living purposes, the transported passengers defined by the manufacturer (driver excluded), and the personal effects. The payload calculation is based on the following parameters: 75 kg for each passenger (driver excluded), 10 kg of baggage for each passenger and for the driver, 10 kg for each metre of length of the vehicle, plus the remaining payload, which can be used for the installation of accessories or for additional baggage.

All masses and loads of the empty vehicle have a tolerance of +/- 5%, in compliance with Directive 2007/46/EC. Any optional equipment increases the mass in running order and decreases the payload. The weight of non-standard accessories is not included in the mass in running order indicated in this catalogue. Additional accessories and devices reduce the payload by a quantity equal to their weight; the incidence of the weight of the individual accessories is shown in the special column in the technical data sheets or can be requested at our dealers. In case certain accessories are installed (for example, additional elements such as coupling device or motorbike rack), the mass of these accessories will affect the payload, possibly reducing it along with the number of certified seats. Please make sure that the maximum loads on the axles and the maximum technically permissible load mass are not exceeded during the complete loading phase of the vehicle. The regulations and requirements of each country may entail changes in the characteristics of this table. The number of certified seats may vary depending on the traffic regulations in force in each country.

+ insulation

+ protection - noise


On a carefree journey; you will always be protected and safe, in every season.

Roller Team vehicles are safe, well **insulated and silent**, thanks to the exclusive **ExPS EVO technology** that ensures insulation and internal protection from both external temperatures and noise.

ExPS EVO TECHNOLOGY:

The protection is absolute for your motorhome in terms of:

- **Increased technical and acoustic insulation** even over time thanks to the wood-free wall structure.
- **Improved protection from the weather** thanks to non-perishable and resistant materials, guaranteeing a long life.
- **Increased structural strength:** the materials used are not affected by moisture, heat or impacts such as hail.
- **Total insulation** in contact zones with the outside using materials with high insulating performance, such as extruded perimeter plastic or inner waterproof PS.
- **Total external protection** of the floor against all weather conditions and wear on the road.
- **Maximum impact resistance**, easily repairable and maintainable.
- With **Extreme Protection System EVO**, 6 years' guarantee against infiltrations!

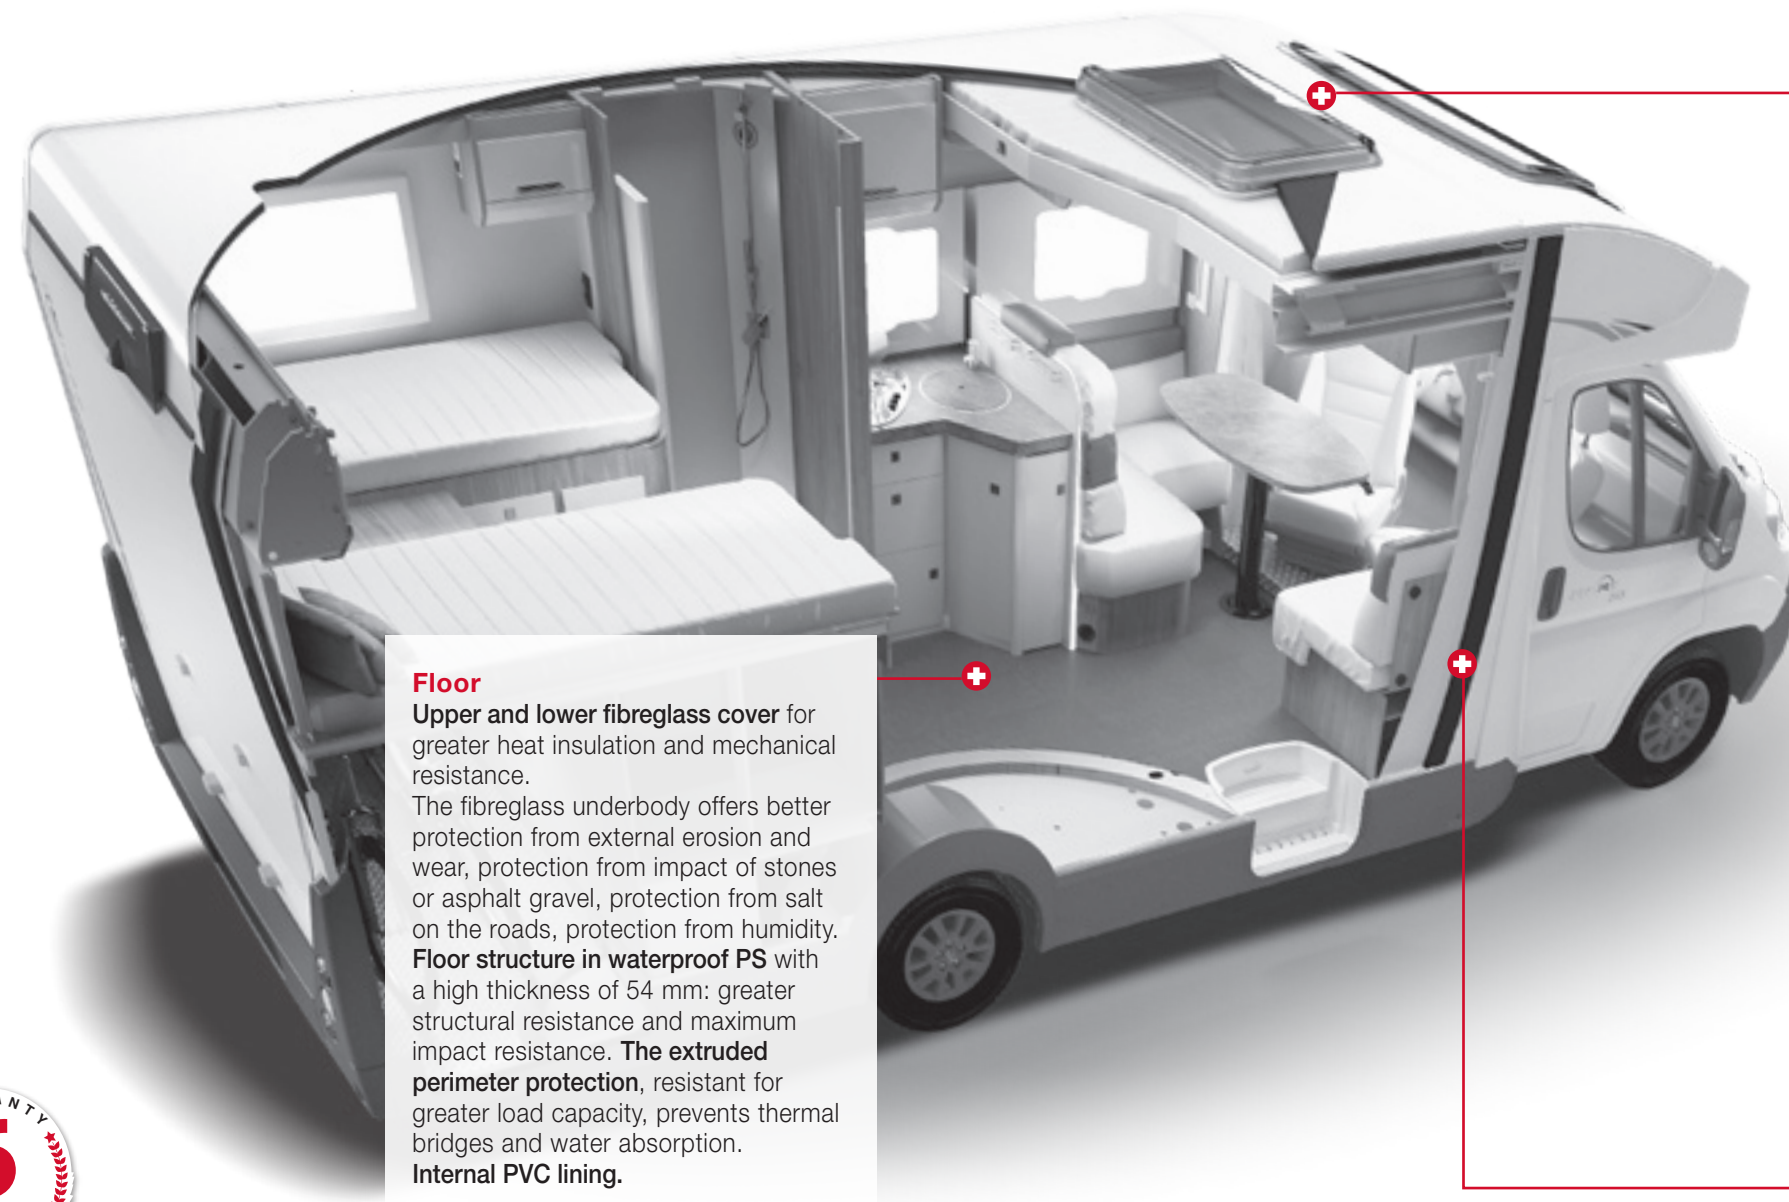

Floor

Upper and lower fibreglass cover for greater heat insulation and mechanical resistance.

The fibreglass underbody offers better protection from external erosion and wear, protection from impact of stones or asphalt gravel, protection from salt on the roads, protection from humidity.

Floor structure in waterproof PS with a high thickness of 54 mm: greater structural resistance and maximum impact resistance. **The extruded perimeter protection**, resistant for greater load capacity, prevents thermal bridges and water absorption. **Internal PVC lining.**

Roof

Hail-resistant external fibreglass.

Internal fibreglass.

Extruded PVC to protect the most critical contact areas. The use of this material prevents the formation of thermal bridges inside the compartment which can be the cause of condensation or heat loss.

Internal structure with waterproof PS inserts for higher insulation and protection. Absolutely no wood.

ROOF THICKNESS 31mm

EXTERNAL FIBREGLASS

WATERPROOF PS

INTERNAL FIBREGLASS

EXTRUDED PVC

WATERPROOF PS

EXTERNAL FIBREGLASS

EXTRUDED PLASTIC

INTERNAL FIBREGLASS

WALL THICKNESS 31mm

PVC COATING

WATERPROOF PS

INTERNAL FIBREGLASS

EXTRUDED

EXTERNAL FIBREGLASS

FLOOR THICKNESS 54mm

Walls

Hail-resistant external fibreglass.

Waterproof PS in all walls: it does not absorb water, thus limiting infiltration inside the vehicle. Absolutely no wood.

High-density perimeteral extruded plastic: prevents any contact between inside and outside avoiding the inlet of water inside the walls.

Fibreglass internal walls, resistant to humidity and free of thermal bridges that can be the cause of condensation or heat loss.



Noise Reduction Technology

The furniture features protection with soft material for furniture-outer body connection.

A plastic spacer separates the lower floor from the chassis rail.

Noise Reduction Technology is here, ensuring greater comfort when travelling thanks to **better build quality**.

breathe

made to breathe

Designed to breathe.

We guarantee a healthy, well-ventilated and condensate-free environment at all times, thanks to Breathe technology.

Through the study of air conditioning and indoor air circulation Roller Team introduces the motorhome that “breathes”.

The Respira-Breath project promotes the study of the distribution of air inside the motorhome by favouring its circulation, getting an even temperature and avoiding the accumulation of condensate.

Because a motorhome cannot only be well insulated from the outside, it must also be well ventilated internally.



A dedicated opening ensures **free air circulation** inside the wall units.
A dedicated opening ensures free air circulation inside the wall units.



Continuous ventilation. The wall units are installed leaving a gap from the wall of the motorhome, thus favouring an **even distribution of air** and avoiding the formation of condensate or mould.



Anti-condensate panels spaced from the wall itself in the living and sleeping areas allow air and heat to circulate.



Bottom of mattresses made of **technical, quilted breathable fabric**. Top and sides made of quilted polyester.



Perimeter heating in models with twin beds or rear transversal bed.



The slatted bases on all rear fixed beds and elevating bed allow air to pass between the base and the mattress.




Overcab heating with additional vents.

BREATHE

Garage and stowage

There's room for all the travels you ever dreamed of.

Those with big projects need their space. Roller Team garages have all the space you need to make your dreams come true, up to 300 kg of independence! (technically loadable weight affecting the approved seats or the remaining total payload; internal height up to 1,350 mm depending on models).

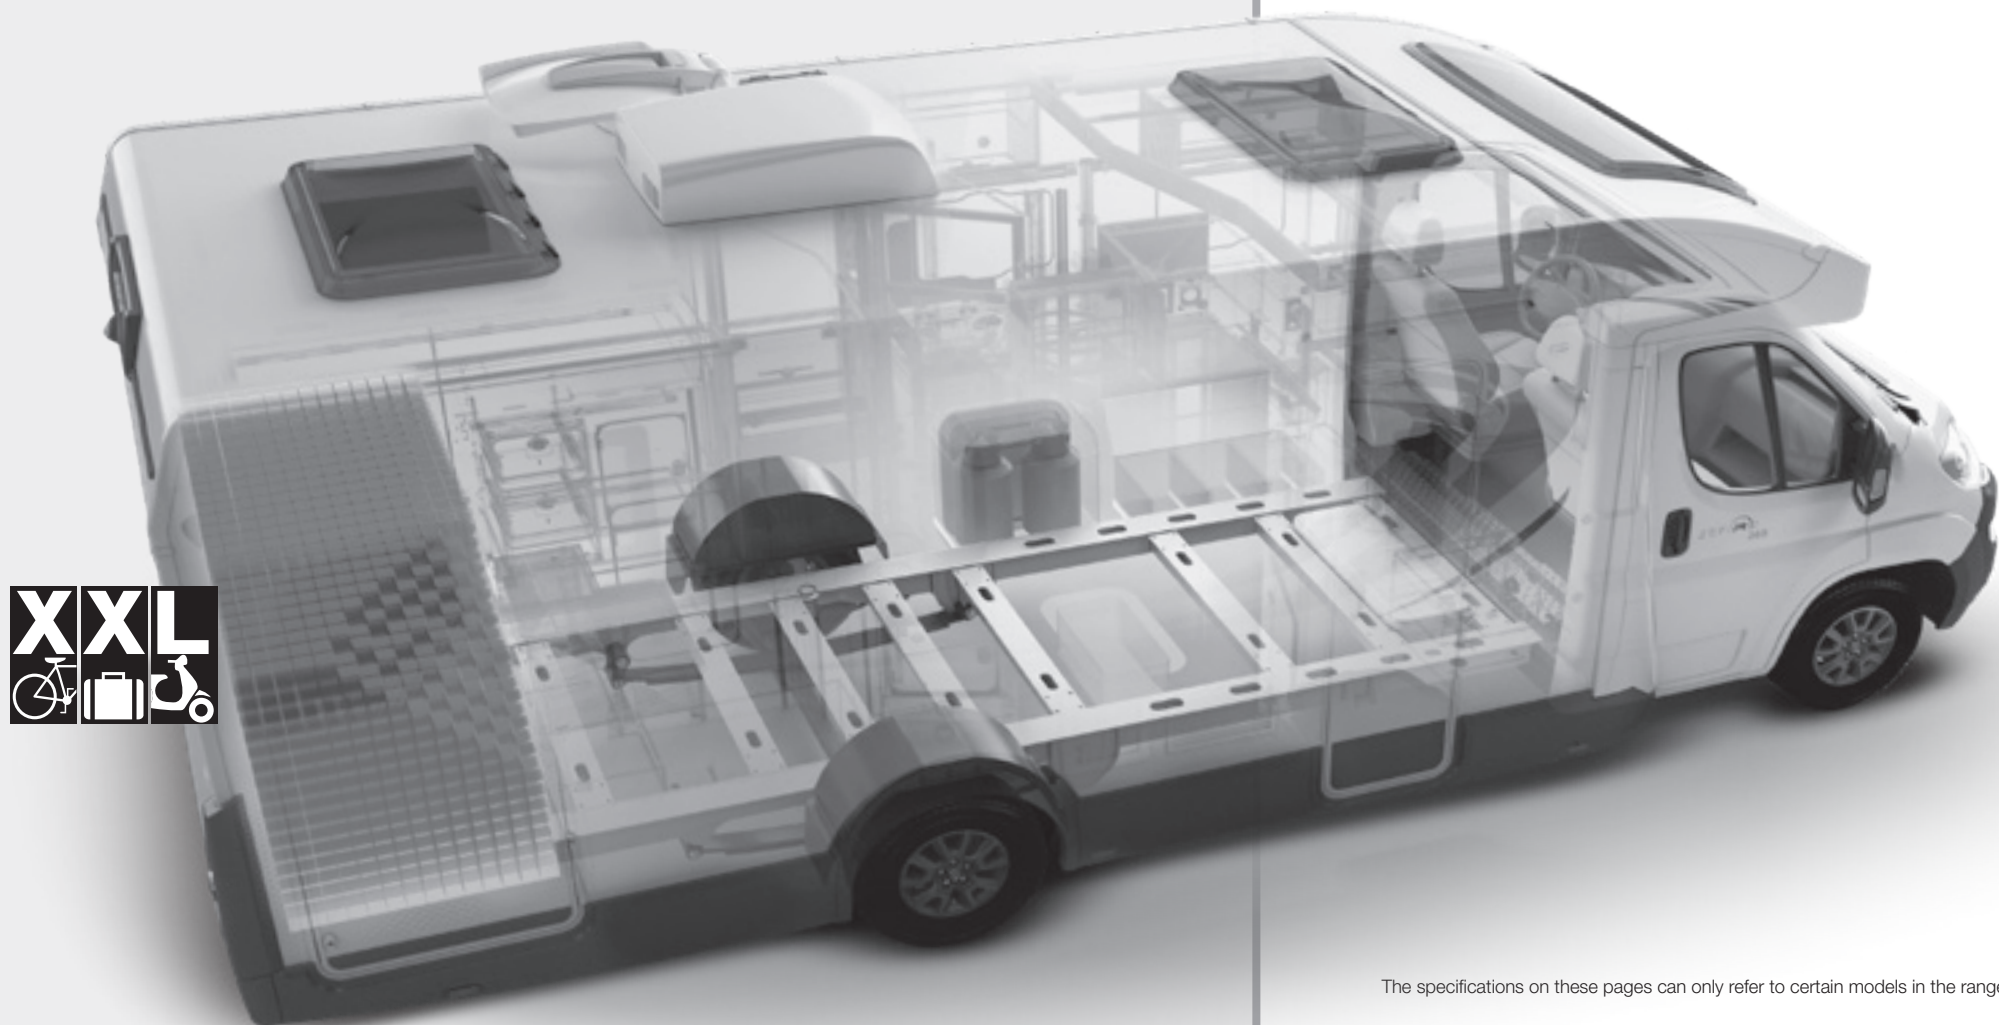

The specifications on these pages can only refer to certain models in the range.



Built properly.

- Lower fibreglass and upper fibreglass and PVC cover for greater heat insulation and mechanical resistance.
- With air vents.
- Double lock in each door for added security.
- Protection against humidity of the garage doors thanks to anti-rain, anti-splash, anti-freeze rubber seals for safe opening also in case of cold temperatures.



Easy to load.

Double maxi-garage access door. Through loading compartment accessible from both sides. Doors that open to 180 degrees: extremely simple access to loads. Large passage, one of the largest in its category (Kronos range).



So flexible it bends to your requirements.

- Where do you want more space? Adjust the volume of the garage to load more ... or have a bigger room.
- Flexspace, elevating bed system for flexible spaces and loads.



You need space but hidden spaces too!

- Opening stowage maxi-garage in side band.
- Stowage space in floor.

The Italian with a Nordic disposition!

Relax, we'll care about the right temperature.

To make you **feel comfortable inside your motorhome**, whatever the temperature outside, Roller Team offers the technology you need... when you need it!
Every Roller Team vehicle uses technologies and materials that ensure high performance and a **perfect climate at all times**.

WINTER HOLIDAY INCLUDED!

Enhance your comfort on board still further with genuine accessories:

- Heated windscreen (motorhome).
- Diesel, gas or electric boosted heater.
- Electronically heated floor.



AVAILABLE IN THE TOURING PACK:

- Insulated tank.
- Insulated step.
- Insulated pipe.



THUMBS UP FROM OUR NORDIC CUSTOMERS: ROLLER TEAM IS ONE OF THEM!

A motorhome designed and built for use in the coldest climates: the construction techniques it takes, high-performance materials in terms of insulation and protection from the elements and specific equipment that's also been tested in the climate chamber.



The specifications on these pages can only refer to certain models in the range.


//Alde heating

If you want to stay warm just like at home, Roller Team offers you Alde heating.

It is a heating system with heat transfer fluid that is heated through a gas boiler. It works on the same principle as home heating. Radiators on all exterior walls and floor pipes heat the air and the room.

Radiator
in rear maxi-garage.

Heated towel rail in the toilet:
a genuine wall heating.

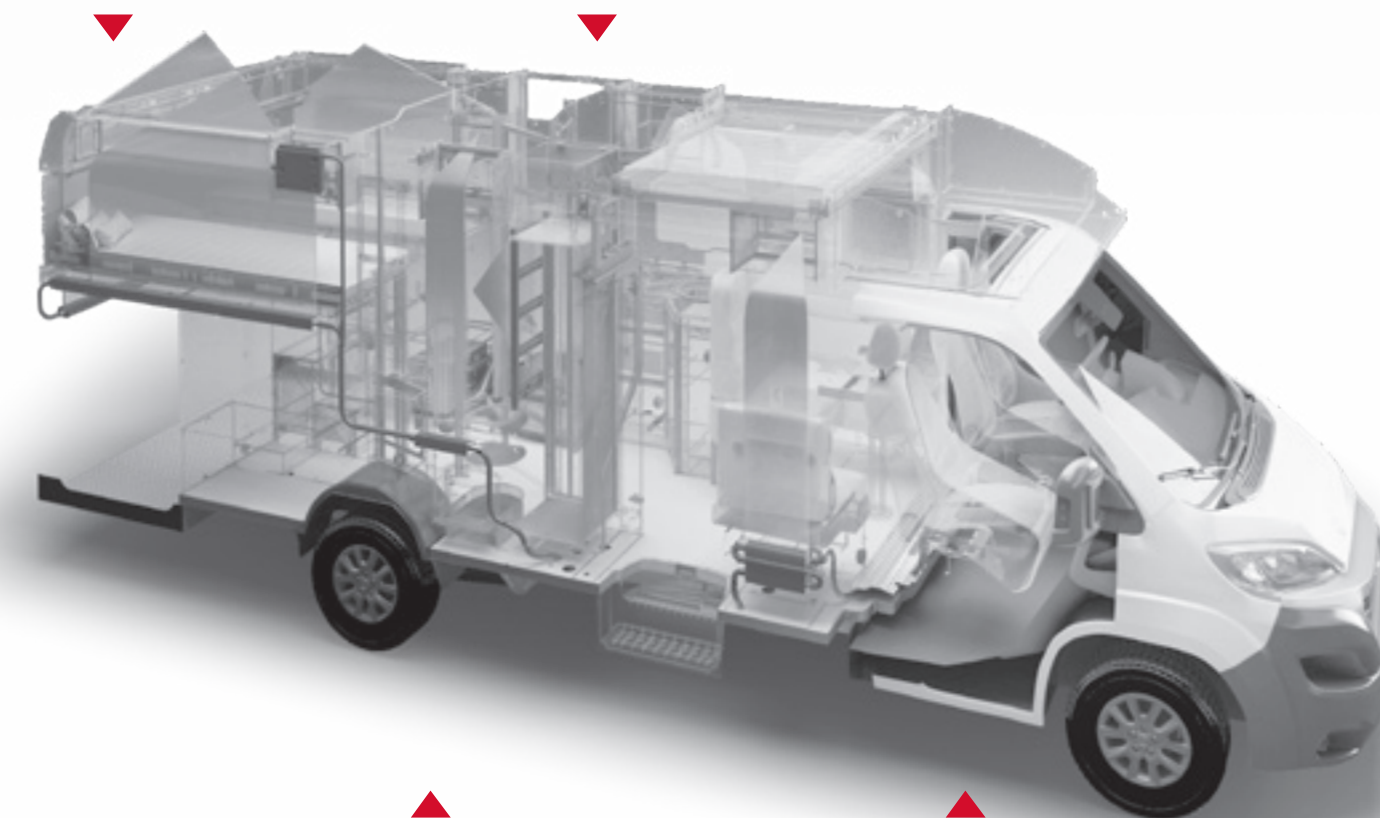

Alde system along the entire perimeter of
the motorhome for constant warmth.

Hot water pipes
under the driving seats.

With the same principle that characterises household systems, a pump circulates the heated liquid in a circuit of radiators reciprocally connected. The radiators heat the air, which is distributed evenly within the motorhome through slits on the wall units. Once the air has cooled, it descends and, passing through slits in the floor, can heat up again and become warm within the circuit.

LET'S LOOK AT THE ADVANTAGES OF HEATING WITH A LIQUID HEAT-TRANSFER MEDIUM.

Enhance your comfort on board still further with genuine accessories:

- **Healthy atmosphere** free from suspended dust and feeling of dryness.
- **Even and longer-lasting warmth.**
- **Low noise** and lack of ventilation.
- **Continuous production** of hot water.

Available on some models in the Kronos and Zefiro range, ask your dealer.

NOTICE - All the information and photos shown herein are to be considered as merely indicative and do not constitute contractual specifications. Trigano S.p.A. reserves the right to make the technical and configuration changes considered appropriate to its vehicles and to change the equipment the vehicles are provided with at any time and with no official notice. Owing to the above, all the information concerning the specifications and equipment of every motorcaravan must be requested before purchase from the dealer, who, acting as sole point of reference, will confirm or rectify the data published herein, updating the customer on the actual features and equipment of the vehicle he/she is interested in and for which negotiations are ongoing. Trigano S.p.A. declines any liability concerning changes, including additions, and/or conversions made after the printing of this document and/or delivery of the vehicle. Weights and dimensions of vehicles and options are subject to change with a tolerance of +/- 5%, dimensions of vehicles with a tolerance of +/- 3%, according to the Directive 2007/46/CE. Important note: Anything which is not included in the standard version of the vehicle, concerning both living quarters and chassis, entails an increase of the mass in running order, with the consequent reduction in the useful load up to the possible reduction in the number of certified seats in case the total weight exceeds the value of the available payload. The available payload consists in the difference between the maximum permissible weight and the mass in running order, with a tolerance of 5%. Therefore, during the purchase phase it is mandatory to carefully consider the weight of any optional equipment you wish to install on the vehicle. This weight is indicated in the specific item of the technical data on www.rollerteam.it. Hence, please remember that the laws in force do not allow the maximum permissible weight indicated in the specific item of the technical data sheets to be exceeded. It is recommended that each user adjust the load and the number of passengers carried to the maximum technically permissible maximum mass of the vehicle. Fitting, removing or alterations carried out c/o unauthorised workshops may compromise your safety and at the same time lead to invalidation of the warranty.

The world Roller Team in a click. All the news in real time, special events, limited offers and much more. Go online now on your PC, tablet or smartphone and enjoy an on-line word of Roller Team: www.rollerteam.it

DEALER'S STAMP


ROLLER TEAM

TRIGANO SpA Loc.Cusona, 53037 - San Gimignano (Siena) Italy
Tel. +39 0577 6501 - info@rollerteam.it - www.rollerteam.it